


Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

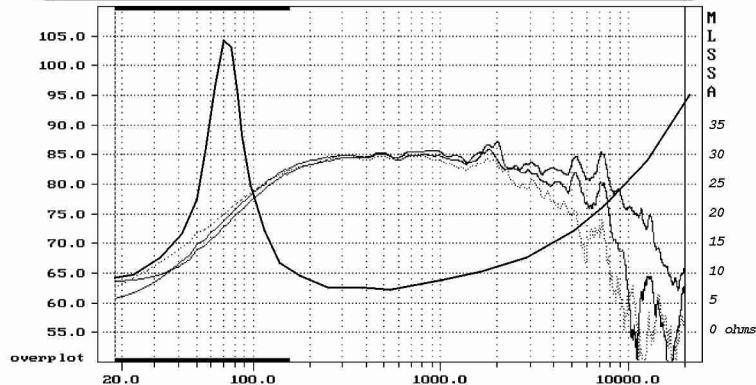

Nominal impedance... 8 ohms
Resonance... 75.72 Hz
Power handling (IEC)... 40 W
Sensitivity (2.83V/1m)... 87.2 dB

Resistance (DC)... 6.46 ohms
Inductance... 0.68 mH
Xmax... ± 2.0 mm
Qms... 3.12
Qes... 0.42
Qts... 0.37
Vas... 3.34 l

Voice coil diam... 25 mm
Voice coil length... 9 mm
Former... kapton
Layer(s)... 1
Wire type... flat
Force factor... 5.83 NA
Moving mass... 4.69 gr

Cone material... HDA
Suspension... rubber
Chassis... die cast
Total mass... 0.90 kg

