




Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

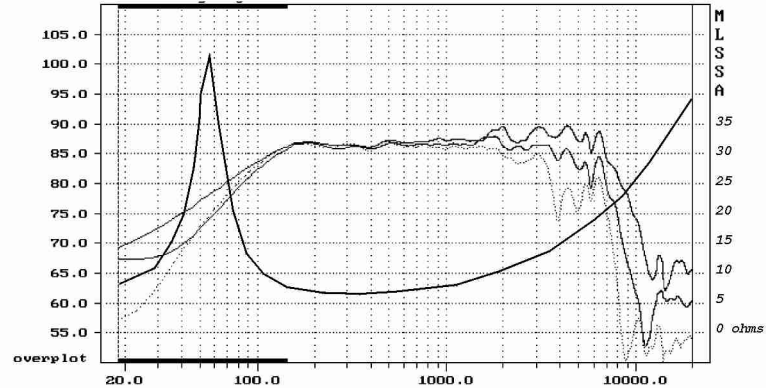

Nominal impedance 8 ohms
Resonance 55.06 Hz
Power handling (IEC) 50 W
Sensitivity (2.83V/1m) 87.2 dB

Resistance (DC) 6.39 ohms
Inductance 0.71 mH
Xmax ± 2.6 mm
Qms 2.48
Qes 0.47
Qts 0.40
Vas 9.74 l

Voice coil diam. 25 mm
Voice coil length 11.2 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 6.27 NA
Moving mass 8.36 gr

Cone material coated paper
Suspension rubber
Chassis die cast
Total mass 1.2 kg

