


Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

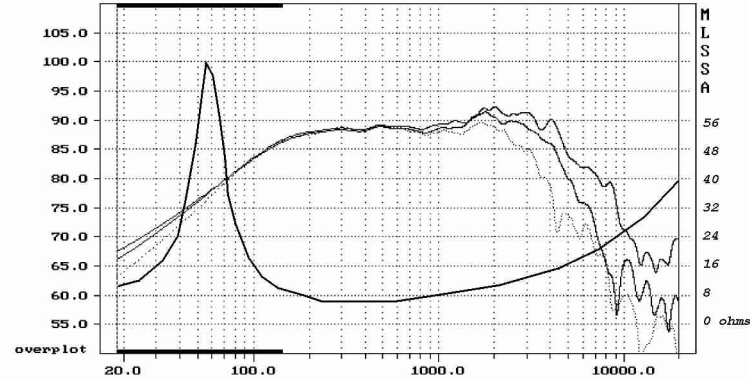

Nominal impedance . . . 8 ohms
Resonance 57.25 Hz
Power handling (IEC) 50 W
Sensitivity (2.83V/1m) 89.8 dB

Resistance (DC) 5.88 ohms
Inductance 0.76 mH
Xmax ± 2.6 mm
Qms 4.08
Qes 0.32
Qts 0.29
Vas 10.58 l

Voice coil diam. 25 mm
Voice coil length 11.2 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 7.90 NA
Moving mass 7.12 gr

Cone material HDA
Suspension rubber
Chassis die cast
Total mass 1.6 kg

