



Technical information



Micro Precision 5.28 & 5.28 o.R. MK II Tweeter

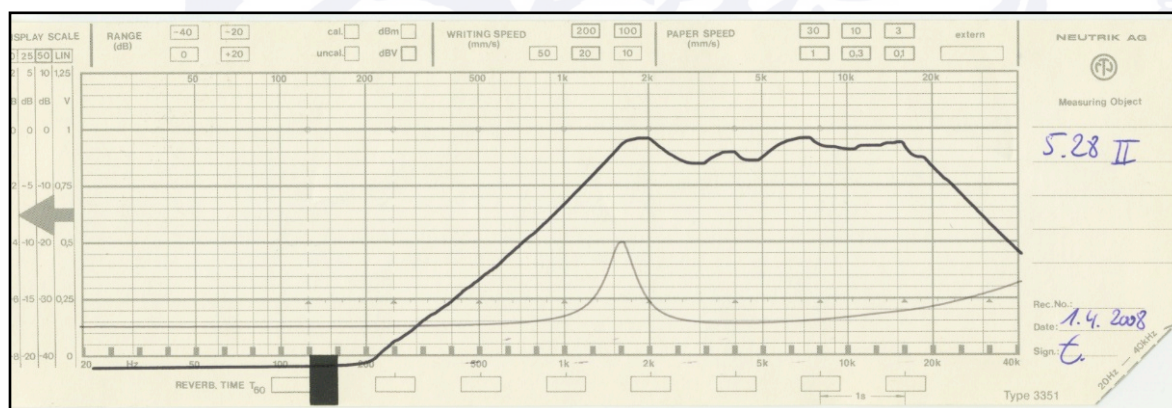

Level	Ohm
	0
-1,5	1
-3,1	2
-4,2	3
-5,3	4
-5,9	5
-7,1	6
-7,8	7
-8,3	8

Technical Data

Height total	29 mm	FS	1400 Hz
Outer Diameter	56 mm / 45 mm	Sensitivity	90 dB 2,83V/1m.
Cutout Diameter	43 mm	R-DC	3,2 Ω
Interior Depth	14 mm	Power handling	60 W
Drillcircle	49 mm / 120 deg.	Voicecoil	Aluminium
		Voicecoil diameter	28 mm
		Membrane	Coated Silk
		Recommended . Filter	3000 Hz / 6dB
Weight	0.150 kg / Pair		