



The P18RNX/P is an 18 cm (6,5") cone driver, developed for use as a long throw high fidelity woofer or woofer/midrange unit. A polypropylene based cone ensures smooth frequency response and low distortion, and the adaptive rubber surround provides an ideal match to the cone over the total frequency range.

The large magnet system gives good transient response, and the bumped back plate together with the very long, and light weight copper clad aluminium voice coil allow for extreme coil excursion with low distortion.

The extremely stiff and stable injection moulded metal basket, keeps the critical components in perfect alignment. Large windows in the basket both above and below the spider reduce sound reflection, air flow noise and cavity resonance to a minimum.

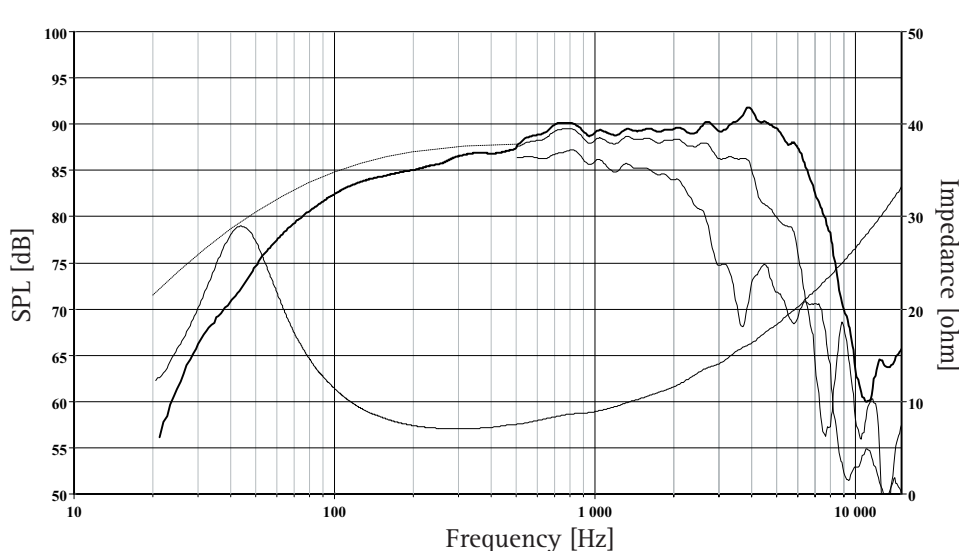

The frequency responses above show measured free field sound pressure in 0, 30, and 60 degrees angle using a 20L closed box. Input 2.83 V_{RMS}, microphone distance 0.5m, normalized to SPL 1m. The dotted line is a calculated response in infinite baffle based on the parameters given for this specific driver. The impedance is measured in free air without baffle using a 2V sine signal.

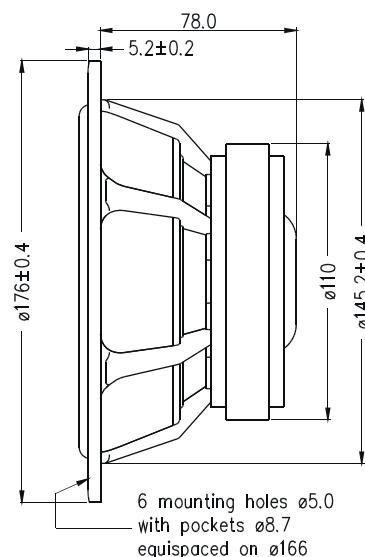

Nominal Impedance	8 Ohms	Voice Coil Resistance	6.1 Ohms
Recommended Frequency Range	40 - 2500 Hz	Voice Coil Inductance	1.18 mH
Short Term Power Handling *	250 W	Force Factor	7.6 N/A
Long Term Power Handling *	80 W	Free Air Resonance	44 Hz
Characteristic Sensitivity (2,83V, 1m)	88.0 dB	Moving Mass	13.1 g
Voice Coil Diameter	39 mm	Air Load Mass In IEC Baffle	0.82 g
Voice Coil Height	18 mm	Suspension Compliance	1.0 mm/N
Air Gap Height	6 mm	Suspension Mechanical Resistance	2.53 Ns/m
Linear Coil Travel (p-p)	12 mm	Effective Piston Area	126 cm ²
Maximum Coil Travel (p-p)	22 mm	VAS	21 Litres
Magnetic Gap Flux Density	1.0 T	QMS	1.52
Magnet Weight	0.64 kg	QES	0.41
Total Weight	1.92 kg	QTS	0.32