


- SOFT FABRIC DOME DIAPHRAGM COATING WITH HIGH LOSS MATERIAL
- FERROFLUID COOLED
- ENGINEERING PLASTIC BACK CHAMBER
- NEODYMIUM MAGNET DESIGN
- LOW 2nd&3rd DISTORION

## 50mm FABRIC DOME/NEODYMIUM

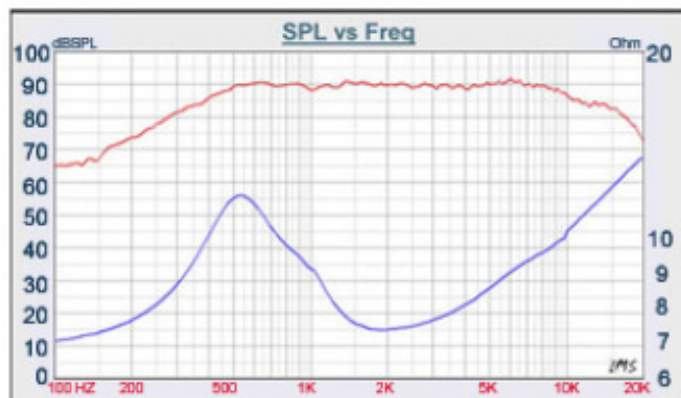

DIAPHRAGM MTL	Fabric
SURROUND MTL	N/A
NOMINAL IMPEDANCE	6 Ω
DCR IMPEDANCE	5.6 Ω
SENSITIVITY 1W/1m	90 dB
FREQUENCY RESPONSE	500hz-10K Hz
FREE AIR RESONANCE	500 Hz
VOICE COIL DIAMETER	52 mm
AIR GAP HEIGHT	4 mm
RATED POWER INPUT	20 W
MAXIMUM POWER INPUT	150 W
FORCE FACTOR, BL	N/A
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	N/A
FERRO FLUID ENHANCED	Yes
SUSPENSION COMPL.	N/A
EFFEC.PISTON AREA	N/A
Levc	0.031 mH
Zo	11 ohm
X-max	0.65mm
Vas	N/A
Qts	0.39
Qms	0.82
Qes	0.74

# TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com