

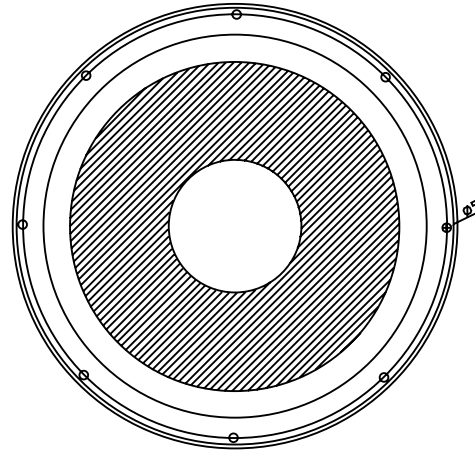




1001A

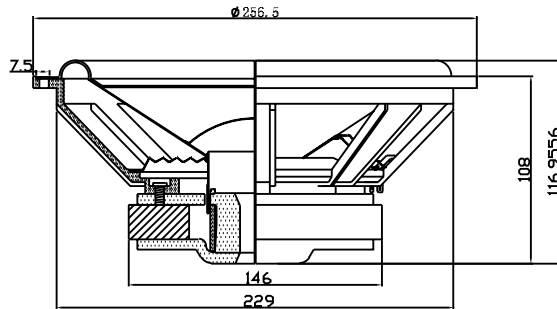

Specifications

NOMIAL IMPEDANCE	4Ω ±15% at 1.0V 1KHz
VC NOMINAL DIA	φ 51.3mm
LOWEST RESONANCE FREQUENCY	FO=29Hz ±3Hz at 1.0V
EFFECTIVE FREQUENCY RANGE	FO ~ 4KHz-10dB 1M/1W
OUTPUT SOUND PRESSURE LEVEL	88dB/W/M ±3dB 300 , 400 , 500 , 600Hz AVE
INPUT	RATED INPUT 100W , MAXIMUM INPUT 150W
FLUX DENSITY	10.85K±10% GUASS
BUZZ & RATTLE TEST	8.0V
POLARITY	POSITIVE - (LEFT) HAND TERMINAL
BAFFLE OPENING	1210mm
MAGNET DIMENION / WEIGHT	145*75*20(mm)/1125g
WEIGHT	3400g
DROPPING TEST	1150mm 75° ±2°
LINEAR EXCURSION (Xmax)	5mm
EQUIVALENT AIR VOLUME (Vas)	100.1723 Litr
MECHANICAL Q (Qms)	4.869
ELECTRICAL Q (Qes)	0.423
TOTAL Q (Qts)	0.390

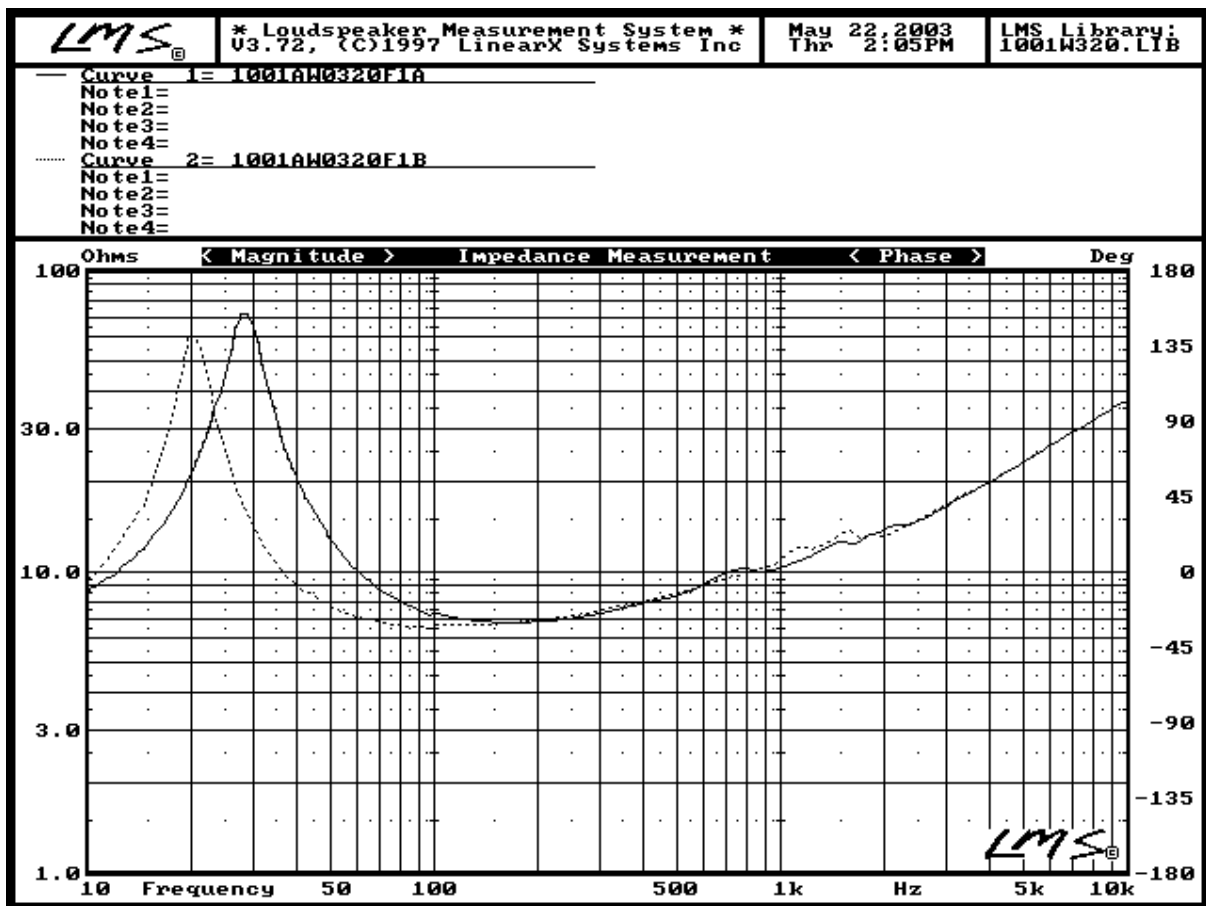

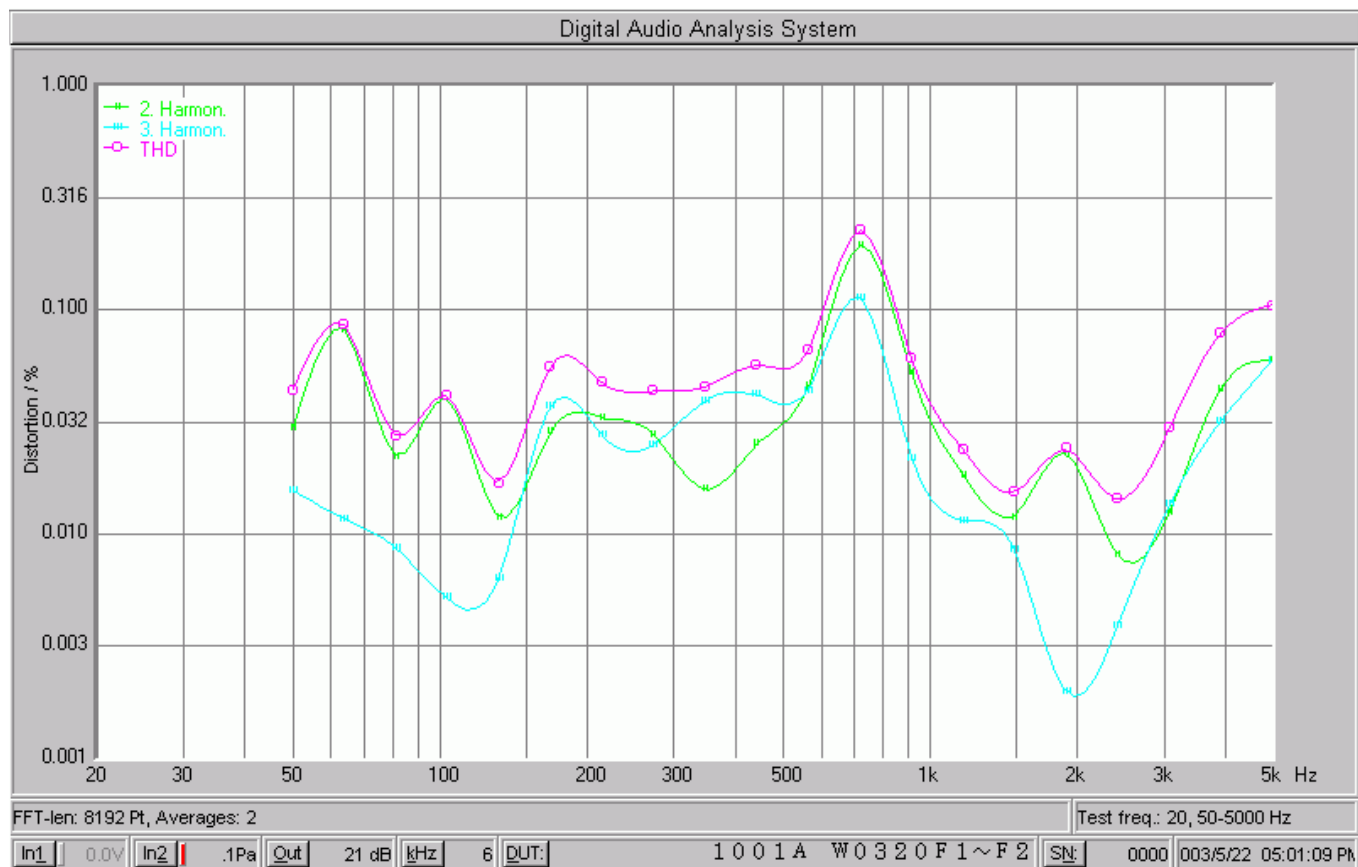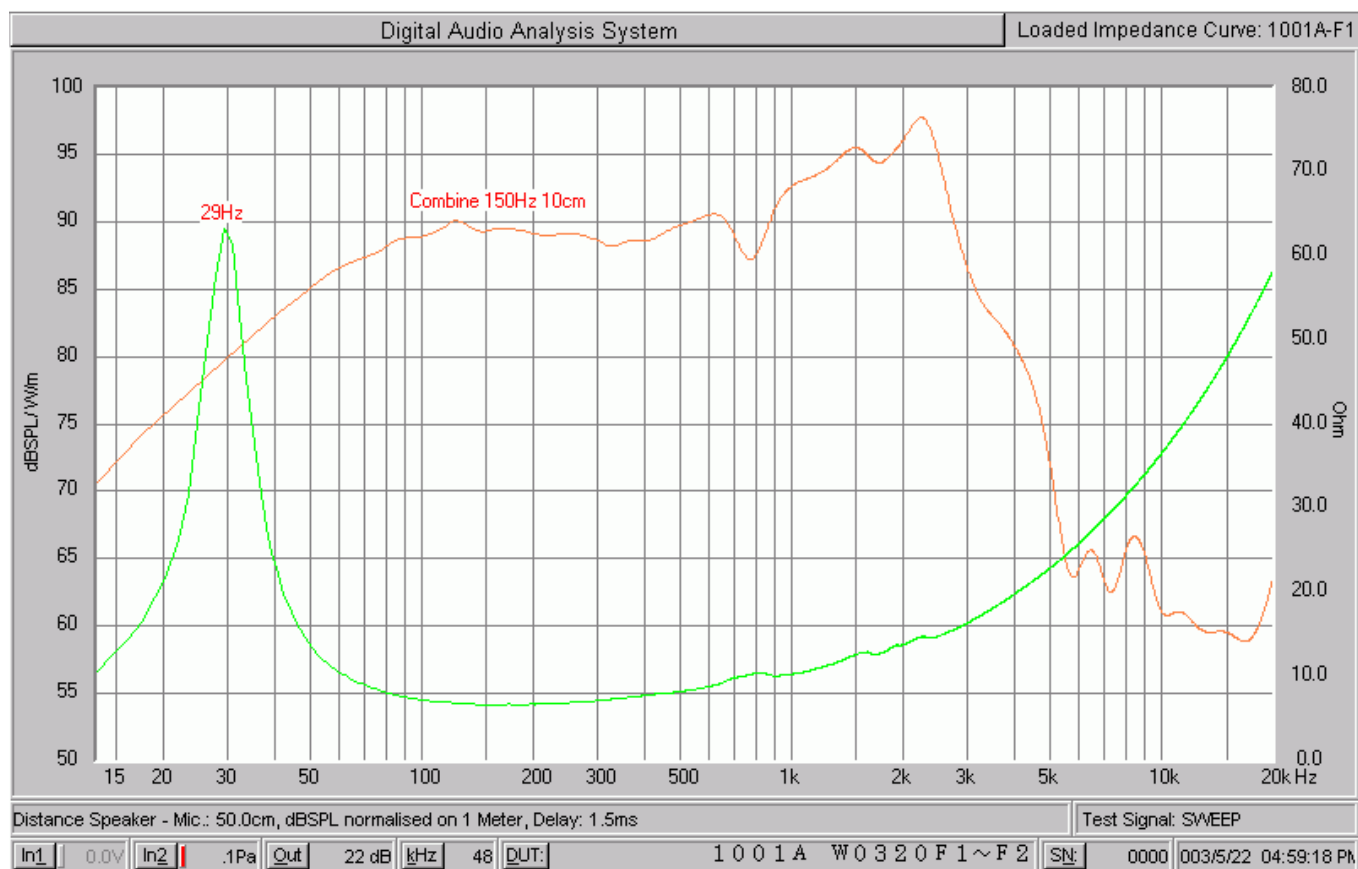

1001A W0320F1

X: 1.0000kHz

Y: 92.69dB

ZA: Live Curve

SSR Fund.



22-MAY-2003 17: 11: 36

Mode: SSR

